

[Enhanced Functions] of updated Firmware version 1.40 for K-1


1. The red-lighted monitor display

Setting:

- [1] Turn the camera ON and press the [MENU] button.
- [2] At the [Setting Menu 5], select [Night Vision LCD Display] by Four-way controller



- [3] Press [Right] key, then selectable items are displayed.

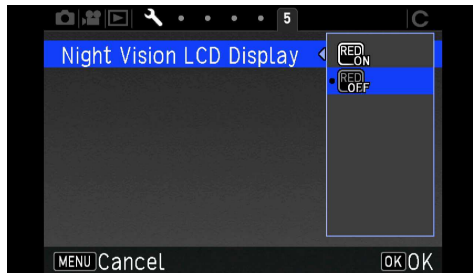

- [4] Press [UP] key to select [ON].



- [5] Press [OK] key to set.



- [6] Press [MENU] button to complete setting.

Setting with the [INFO] button.

Following the procedures of [Customizing the Control Panel] in the page 20 of the Operation Manuals, you can also set the same on the Control Panel and can be set it by [INFO] button.



When you select [ON], it will switch to the red-lighted display.



2. The Bulb timer function

Setting

- [1] Turn the camera ON and set the mode dial to the [B(Bulb)].
- [2] The [Green] button is pressed, the display will be changed to the [Timer] from the [Bulb].



- [3] Turn the [Front e-dial] to set the exposure time.

You can set the exposure time between 10" to 20'00" and the exposure start when the shutter button is pressed fully, the shutter will be kept open until come up to the setting time.



Memo:

- When shooting with the [Bulb] mode, fix a camera firmly with the tripod. It is also recommended to use optional Remote Controller or Cable Switch.
- The drive mode cannot be set to [Continuous shooting], [Bracketing] or [Interval Shooting].